


STI STOPPER® STATION SERIES

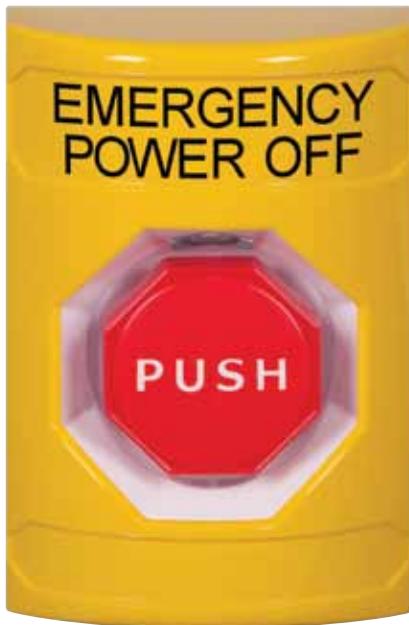

PRODUCT OVERVIEW

These ADA Compliant, multipurpose push button switches cover a wide range of applications both indoors and outdoors. They're called Stopper Stations. They incorporate a unique, patented design that helps dramatically to stop accidental activation. A number of standard models are available or we can create custom units to meet your needs exactly. You have your choice of any of five universal shell colors, several button styles, standard or custom wording and language.

HOW THEY WORK

Because of their superior, patented design combined with quality construction throughout, you can expect outstanding performance for years to come. In fact, many STI customers are surprised to find that all this quality is available at no increase in price. Plus, customers appreciate the option to protect the switches with STI protective covers that carry a three year guarantee against breakage in normal use, one year on electro mechanical and electronic components. For indoor applications, you can order your Stopper Station with a pre-alarm cover to help stop malicious and accidental activation.

KEY FEATURES

General Information

- Multipurpose push button switches cover a wide range of applications both indoors and outdoors.
- Three year guarantee against breakage of polycarbonate in normal use (one year on electro mechanical and electronic components).

Design

- Unique, curved design helps protect against accidental activation.

Construction

- Station housing molded of tough polycarbonate.
- UL Listed to U.S. and Canadian safety standards.
- Momentary models used with LT-1UL Latching Timer Module are Listed for access control.
- Stainless steel backplate.
- Push buttons are ADA Compliant (excludes "3" key switch button).

Installation

- 5VA flammability rating on backplate and spacer.
- Typical working properties of polycarbonate are -40° to 250°F (-40° to 121°C).
- Polycarbonate complies with FDA regulations for food contact applications.

Options

- Your choice of colors — red, green, yellow, white or blue.
- Standard or custom text or hi-res logo.
- Custom text in any language.
- Protect with STI indoor/outdoor protective covers.

STI Stopper® Station Series

Dimensions and Technical Information

UNIQUE BUTTON FEATURES

Models SS2xy0, SS2xy1, SS2xy3, SS2xy4

- Interchangeable or replaceable N.O. or N.C. SPST gold-plated contact blocks rated for 6 amps @ 600 VAC or 1 amp @ 250 VDC.
- Standard switch includes one N.O. and one N.C. contact. Holds up to three sets of isolated contacts.
- SS2xy0 and SS2xy1 rated for 6000 operations.
- SS2xy4 rated for 100,000 operations.


Note: some standard single gang boxes need additional depth. To add 5/8" depth, order KIT-102722-color (B=blue, G=green, R=red, Y=yellow, W=white, E=orange).

Models SS2xy2, SS2xy5, SS2xy9

- Two (2) Form "C" contacts, DPDT, rated 10 amps @ 125/250 VAC, 1/2 HP, 6 amps @ 30 VDC.
- 12-24VAC/VDC LED (LED red, green, and white).
- Over 100,000 operations.

Model SS2xy6

- Two (2) Form "C" contacts, DPDT, rated 10 amps @ 125/250 VAC, 1/2 HP, 6 amps @ 30 VDC.
- 12-24VAC/VDC LED
- 100,000 operations.

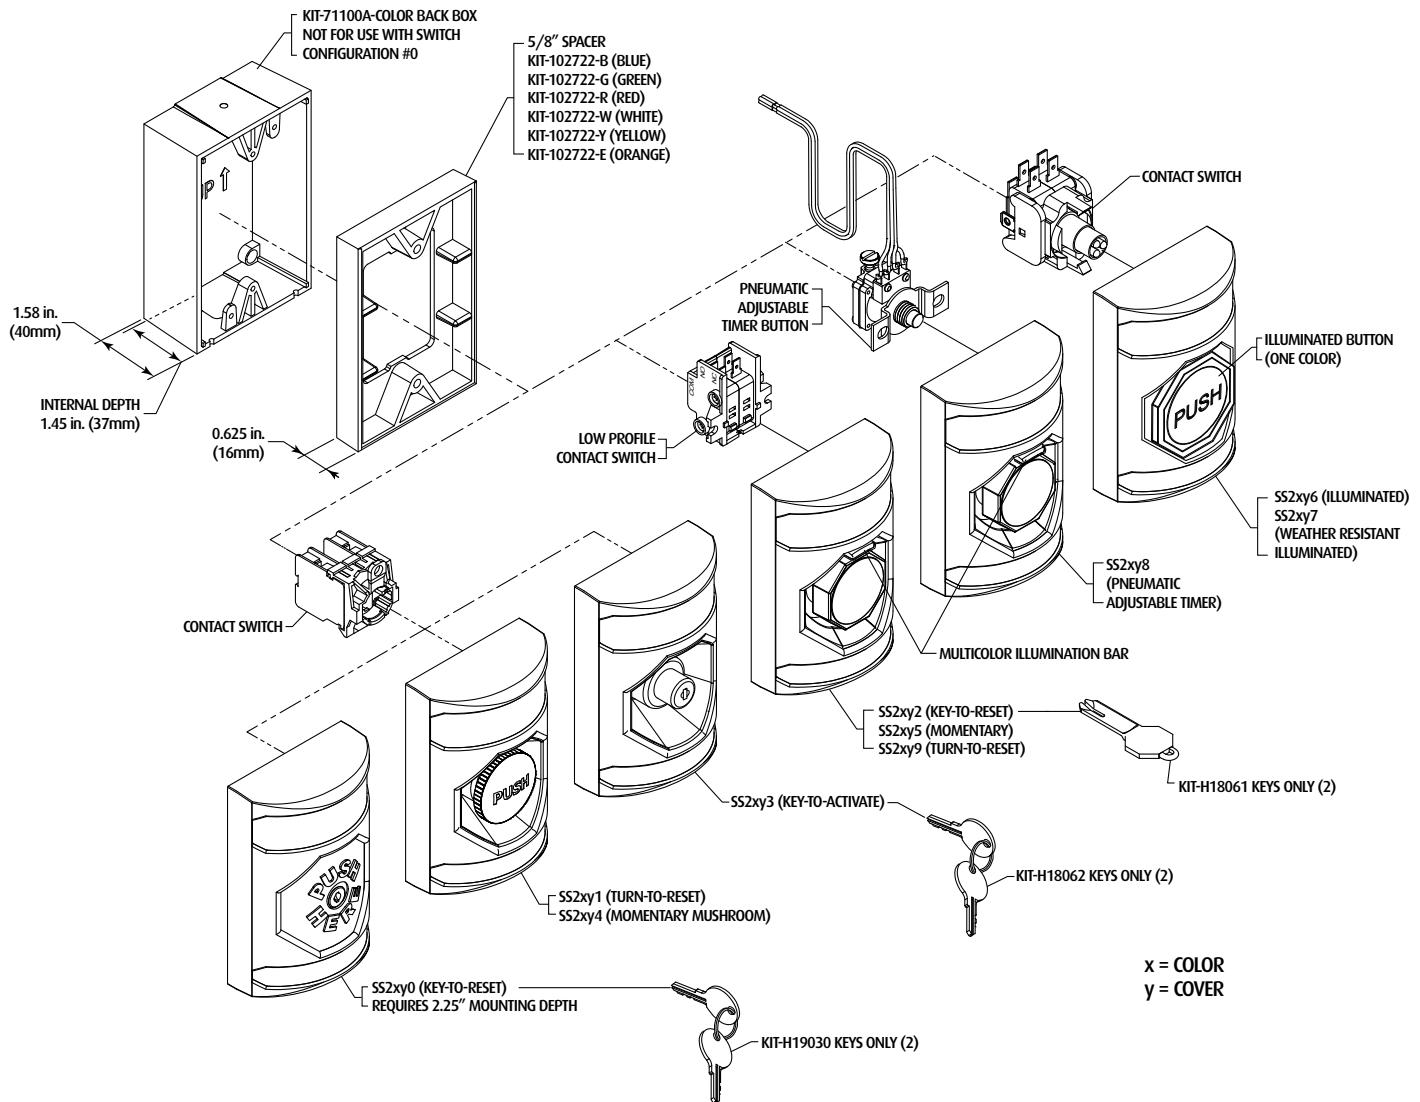

STI Stopper® Station Series

Dimensions and Technical Information

APPROVALS & WARRANTY

TESTING

It has been tested and approved or listed by:

- UL/cUL File No. S7255
- Complies with UL 2017. UL Listed for indoor and outdoor use ("8" button indoor only, temperature range 15° to 120°F). When mounting outdoor, must use an STI weather cover.
- UL/cUL Type NM suitable for indoor or outdoor use without a cover (#7 button only)
- UL 294 (models used with LT-1UL)
- CSA C22.2 No. 205
- ADA Compliant (excludes "3" button)

WARRANTY

Three year guarantee against breakage of polycarbonate in normal use (one year on electro mechanical and electronic components).

Accessories


LT-1UL	UL Latching/Timer Module
KIT-71100A-*	Back box for 2, 5, 8 and 9 switch
KIT-71101A-*	Back box & Spacer Kit for 1, 3 or 4 switch
KIT-E10196	N.O. contact for 0, 1, 3 or 4 switch
KIT-M10197H	Replacement contact holder for 0, 1, 3 & 4 switch
KIT-E10198	N.C. contact for 0, 1, 3 or 4 switch
KIT-102722-*	Plastic Spacer - adds 5/8" depth
KIT-H19030	Two Extra Keys for 0 switch
KIT-H18061	Two Extra Keys for 2 switch
KIT-H18062	Two Extra Keys for 3 switch

* R=red, B=blue, G=green, Y=yellow, W=white, E=orange

"A" - Contact Depth

SS2xy0*	2.16"
SS2xy1	2.04"
SS2xy2	1.00"
SS2xy3*	2.13"
SS2xy4	2.04"
SS2xy5	1.00"
SS2xy6	.875"
SS2xy7	.875"
SS2xy8	1.4"
SS2xy9	1.00"

* If extra depth needed in electrical box order KIT-102722-color.

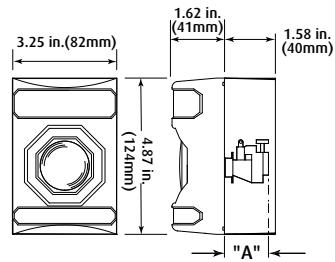


STI Stopper® Station Series

Dimensions and Technical Information

COLOR

- 0. Red
- 1. Green
- 2. Yellow
- 3. White
- 4. Blue
- 5. Orange

SS2

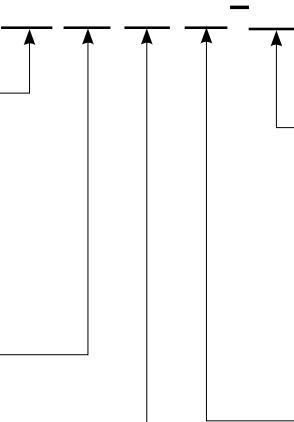

LANGUAGE

- EN = English
- ES = Spanish
- FR = French
- ZL = Other Language

TEXT

- AB = ABORT
- EM = EMERGENCY
- EX = EMERGENCY EXIT
- PO = EMERGENCY POWER OFF
- ES = EMERGENCY STOP
- EV = EVACUATION
- XT = EXIT
- PS = FUEL PUMP SHUT DOWN
- HV = HVAC SHUT DOWN
- LD = LOCKDOWN
- PX = PUSH TO EXIT
- NT = No Text
- ZA** = Custom Text

COVER

Flush

- 3. Universal Stopper, label shell*
- 4. Universal Stopper, horn*

Surface

- 7. Universal Stopper, label shell*
- 8. Universal Stopper, horn*

Flush or Surface

- 2. Shield
- A. Shield with sound
- 0. No Cover

*Orange coming soon

SWITCH CONFIGURATION

- 2. Key-to-Reset (Illuminated Bar)
- 5. Momentary (Illuminated Bar)
- 9. Turn-to-Reset (Illuminated Bar)
- 8. Pneumatic (Illuminated Bar)
- 6. Momentary (Illuminated)
- 7. Weather Resistant Momentary (Illuminated)
- 0. Key-to-Reset*
- 1. Turn-to-Reset
- 3. Key-to-Activate
- 4. Momentary

*Not available in orange

CUSTOMIZE YOUR TEXT - text option ZA White text on blue, red and green; black text on yellow, white and orange.

CUSTOM TEXT FOR TOP OF SHELL:

2 LINES, 20 CHARACTERS EACH (INCLUDES SPACES)

ST1

ST2

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

CUSTOM TEXT FOR BOTTOM OF SHELL:

1 LINE, 20 CHARACTERS (INCLUDES SPACES)

SB

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

CUSTOM TEXT COVER 3, 4, 7, 8:

2 LINES, 40 CHARACTERS EACH (INCLUDES SPACES)

C1

C2



**Safety Technology
International**

2306 Airport Road
Waterford, Michigan
48327, USA

Tel: 248-673-9898
Fax: 248-673-1246
info@sti-usa.com
www.sti-usa.com

Taylor House
34 Sherwood Road
Bromsgrove, Worcestershire
B60 3DR, England

Tel: +44 (0)1527 520 999
Fax: +44 (0)1527 501 999
info@sti-emea.com
www.sti-emea.com