


## TR-24 & TR-24-S Turnbuckle, TR-4A & TR-4A-S Eyebolt and TR-5G

### Protectowire Linear Heat Installation Accessories


- The TR-24 and TR-24-S Turnbuckle are used to attach and add tension to one end of messenger wire to a supporting structure.
- TR-24 Materials: zinc plated steel
- TR-24-S Materials: Body - aluminum, Bolts - 304 stainless steel
- TR-5G = zinc plated steel  
Temperature Rating: -70°F to 300°F (-57°C to 149°C)  
1/4"-20 locknuts

- The TR-4A and TR-4A-S Eyebolt is used to attach one end of messenger wire to a supporting structure.
- TR-4A Materials: zinc plated steel
- TR-4A-S Materials: 304 stainless steel
- 1/4-20 Thread size


#### TURN-BUCKLE TR-24

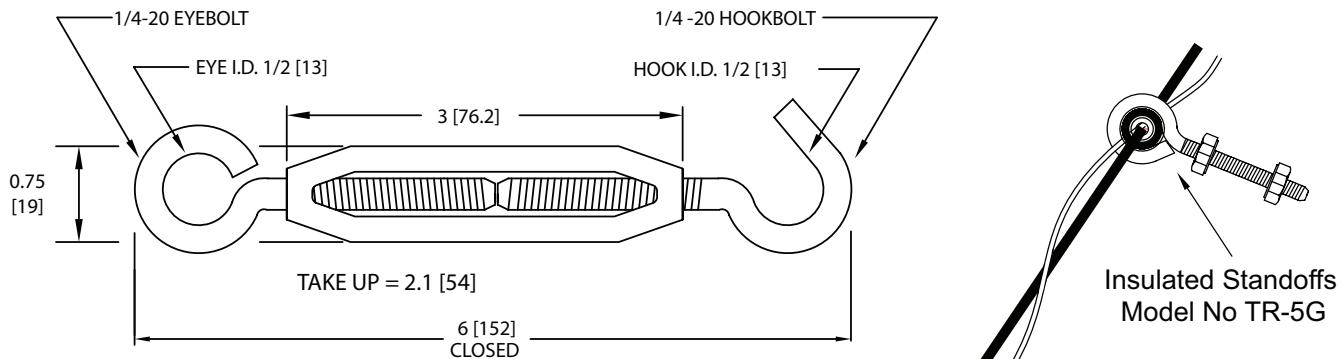

#### EYEBOLT MODEL TR-4A

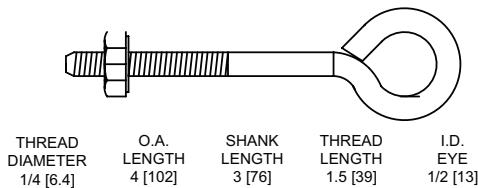

#### TR-5G

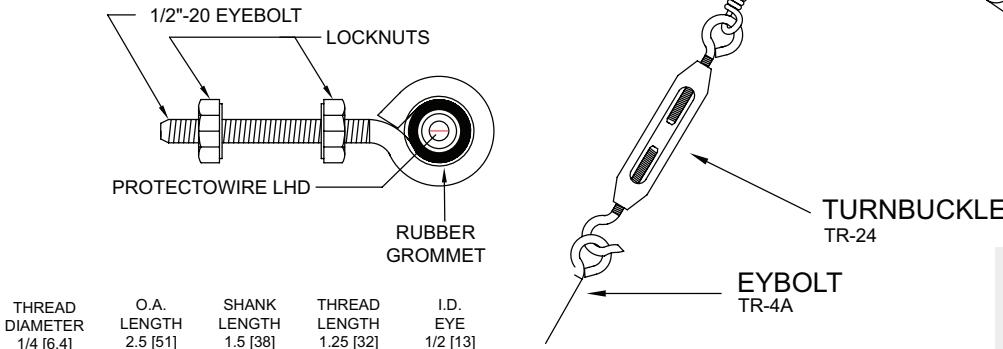

All dimensions approximate: inch [mm]  
Subject to change with or without notice  
Not to scale