



PC-LINKED SMART CARD READER

ACR39U


COMPACT & STYLISH

The ACR39U combines present-day technology in the form of the latest compact and stylish smart card reader. It supports **ISO 7816 Class A, B and C smart cards** (5 V, 3 V, 1.8 V), **microprocessor cards** with the T=0 and T=1 protocol as well as a wide variety of memory cards in the market, including the Secure Internet Protocol Router Network (SIPRNET) Card, the Department of Defense Common Access Card (CAC) and the Malaysian Identity Card (MyKad). The ability to support multiple smart cards makes the ACR39U ideal for a diverse range of solutions, such as PIV application, physical and logical access control and digital signatures.

Compliant with both PC/SC and CCID, the ACR39U can be operated using the plug and play function, ensuring convenience and mobility for its users. It is also designed to be integrated into any computer-based environment as the reader is compatible with various operating systems such as Windows®, Linux®, macOS, Solaris™ and Android™. EMV™ Level 1 (Contact) and People's Bank of China (PBOC) certified, the ACR39U is without a doubt, the ideal smart card reader for your e-Banking and e-Payment application needs.

KEY FEATURES

- ✓ **Supports Various Types of Contact Cards**
 - ISO 7816 Class A, B and C (5 V, 3 V and 1.8 V)
 - Microprocessor Card (T=0, T=1)
 - Memory Card
 - Mykad Card
 - CAC, J-LIS, SIPRNET Smart Cards
- ✓ **Reliable**
 - Compliant with International Regulations
 - Mean Time Between Failures (MTBF) up to 500k Hours
 - Card Insertion Cycles: 200k Times
 - Short Circuit Protection
- ✓ **Compatible**
 - Windows®, Linux®, macOS, Solaris™ and Android™

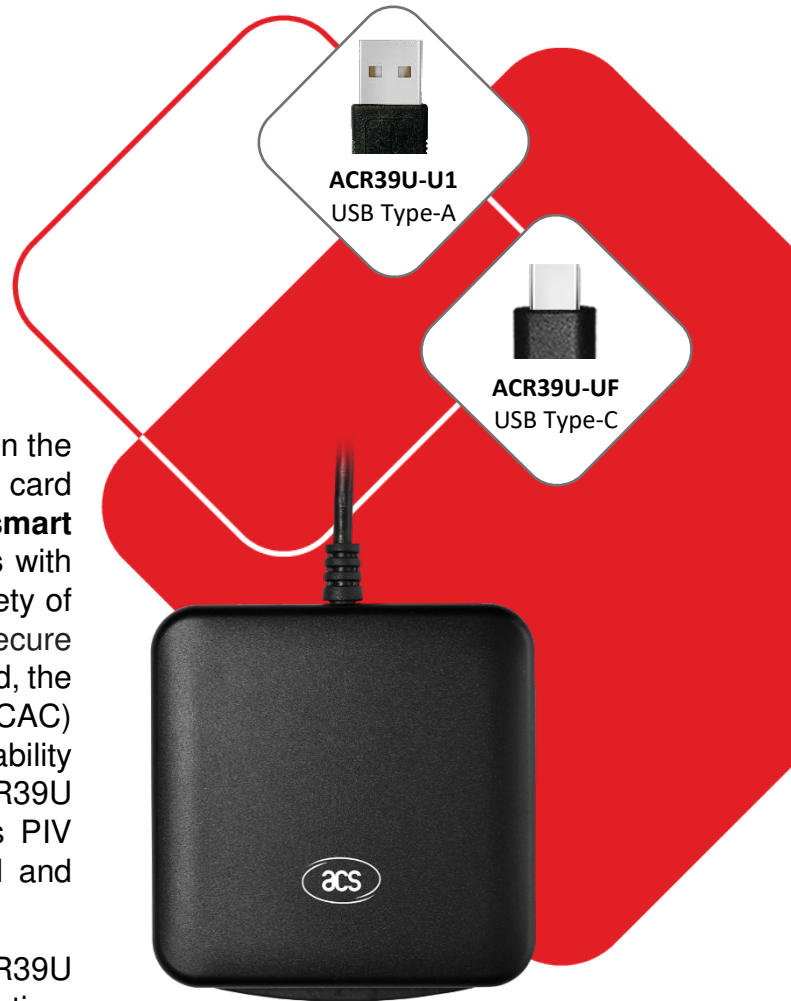

COMMON APPLICATIONS

e-Government
e-Banking and e-Payment
e-Healthcare
Public Key Infrastructure
Network Security
Access Control
Loyalty Program




TECHNICAL SPECIFICATIONS

Contact Smart Card Interface	
Number of Slot(s)	1 Full-Sized Card Slot
Supported Card Types	ISO 7816 Parts 1-4, Class A, B, C (5 V, 3 V, 1.8 V), Microprocessor Card (T=0, T=1), Memory Card, MyKad Card, CAC, J-LIS, SIPRNET Smart Cards
Supply Current	Max. 50 mA
Read/Write Speed	9.6 – 600 Kbps
Clock Frequency	4.80 MHz; Operates Up to 16MHz
Card Connector	6pin Contact
Card Insertion Cycles	Min. 200,000 Min. 300,000 (For Landing Connector)
PPS (Protocol and Parameters Selection)	Supported
Short Circuit Protection	Supported
Host Interface	
Protocol	USB CCID
Connector Type	ACR39U-U1 : USB Type-A ACR39U-UF : USB Type-C
USB Interface	USB 2.0 Full Speed (12Mbps) Compatible with USB 3.0
Supply Voltage	5 V
Cable Length	1.5 m (Non-Detachable)
Application Programming Interface	
PC-Linked Mode	PC/SC

Physical Characteristics	
Dimensions	72.2mm (L) × 69.0mm (W) × 14.5mm (H)
Weight	ACR39U-U1 : 65 g ± 5.0 g ACR39U-UF : 56 g ± 5.0 g
Available Colour(s)	Black (Matte)
Peripherals	
LED	Green
Operating Conditions	
Temperature	0 - 60°C
Humidity	Max. 90% (Non-Condensing)
MTBF	500,000 Hours
Power Source	USB Port
Certifications/ Compliances	
Standards	USB CCID, PC/SC, Microsoft® WHQL, EMV™ Level 1 (Contact), PBOC Level 1 (Contact), J-LIS, TAA
Regulatory/ Environmental	CE, IEC/EN 62368, FCC, VCCI, UKCA, RoHS, REACH, KCC, UL, BIS
Driver & Support	
Driver Supported OS	Windows®, Linux®, macOS, Solaris™, Android™
Plug and Play	Supported
Model/Part Number	
Default [USB Type-A]	ACR39U-U1
Default [USB Type-C]	ACR39U-UF

MECHANICAL SPECIFICATIONS

Note: All dimensions in mm

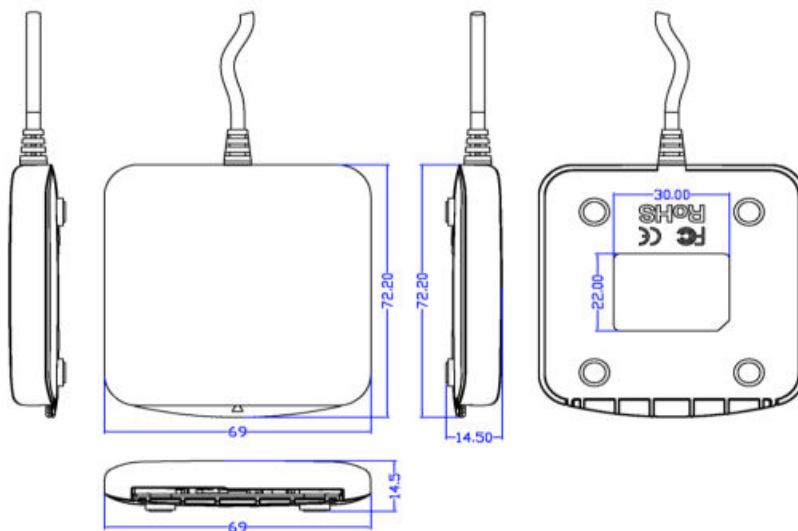

About ACS

Advanced Card Systems Ltd. (ACS), founded in 1995, is Asia Pacific's top supplier and one of the world's top 3 suppliers of PC-linked smart card readers. ACS is the winner of the Product Quality Leadership Award for Smart Card Readers from Frost & Sullivan. ACS was listed in Forbes Asia's "Best Under a Billion" list for several years, an inter-industry list comprised of 200 top-performing publicly listed companies in the Asia-Pacific, with sales between US\$5 million and US\$1 billion. ACS develops a wide range of high-quality smart card reading/writing devices, smart cards and related products and distributes them to over 100 countries worldwide.

Click [here](#) for Sales Enquiry

Tel: +852-2796-7873

Fax: +852-2796-1286

Android is a trademark of Google LLC.

EMV is a registered trademark or trademark of EMVCo LLC in the United States and other countries.

Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries.

macOS is a trademark of Apple Inc., registered in the U.S. and other countries.

Microsoft® and Windows® are either registered trademarks or trademarks of the Microsoft Corporation in the United States and/or other countries.

Solaris™ is a registered trademark of Oracle and/or its affiliates in the United States and other countries.



www.acs.com.hk

info@acs.com.hk